




EMI Shielding Gasket


Structure

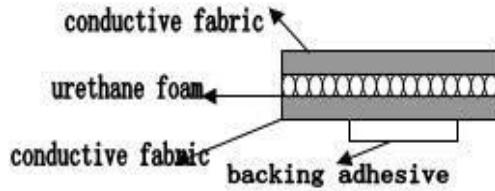

Performances:

Frequency	Attenuation
30 MHz	90
100 MHz	>100
500 MHz	>100
1 GHz	>100
10 GHz	110
Surface resistivity:	Nickel/Copper < 0.05 ohms/square
Abrasion resistance:	Excellent
Compression set:	< 10% (typical)
Temperature range:	-40 to +70° (typical)

For such as below shape, please provide the details drawing if there is some require for the angles or others



B shape please contact us if you need other size.

Part No	W(mm/in)	H(mm/in)	Part No	W(mm/in)	H(mm/in)
PM-K-11-09	11.3(0.445)	0.9(0.035)	PM-k-8-09	8(0.315)	0.9(0.035)