


## EMI Shielding Gasket


### Structure

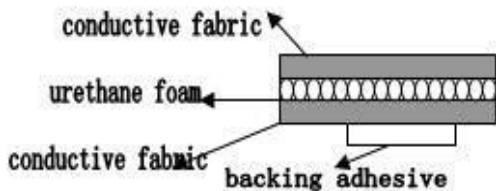

### Performances:

Frequency	Attenuation
30 MHz	90
100 MHz	>100
500 MHz	>100
1 GHz	>100
10 GHz	110
Surface resistivity:	Nickel/Copper < 0.05 ohms/square
Abrasion resistance:	Excellent
Compression set:	< 10% (typical)
Temperature range:	-40 to +70° (typical)

For such as below shape, please provide the details drawing if there is some require for the angles or others



C fold shape please contact us if you need other size.

Part No	W(mm/in)	H(mm/in)	Part No	W(mm/in)	H(mm/in)
PM-L-8-8	8(0.315)	8(0.315)	PM-L-13.6-5	13.6(0.5354)	5(0.1969)
PM-L-7.1-6.4	7.1(0.2795)	6.4(0.252)	PM-L-10.5-6.1	10.5(0.4134)	6.1(0.2402)
PM-L-15-14	15(0.5906)	14(0.5512)	PM-L-17.4-8.8	17.4(0.685)	8.8(0.3465)
PM-L-7.5-8	7.5(0.2953)	8(0.315)	PM-L-13.6-5	13.6(0.5354)	5(0.1969)
PM-L-8.3-5	8.3(0.3268)	5(0.1969)	PM-L-10.7-9.8	10.7(0.4213)	9.8(0.3858)
PM-L-12-5.5	12(0.4724)	5.5(0.2165)			