


## EMI Shielding Gasket


### Structure

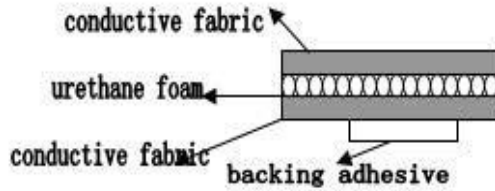

### Performances:

Frequency	Attenuation
30 MHz	90
100 MHz	>100
500 MHz	>100
1 GHz	>100
10 GHz	110
Surface resistivity:	Nickel/Copper < 0.05 ohms/square
Abrasion resistance:	Excellent
Compression set:	< 10% (typical)
Temperature range:	-40 to +70° (typical)

**For such as below shape, please provide the details drawing if there is some require for the angles or others**

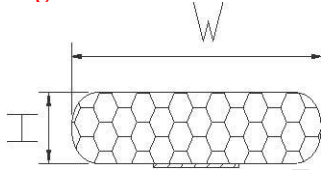

Oval shape please contact us if you need other size.

Part No	W(mm/in)	H(mm/in)	Part No	W(mm/in)	H(mm/in)
PM-OV-4-2	4(0.1575)	2(0.0787)	PM-OV-12.7-2.7	12.7(0.5)	2.7(0.1063)
PM-OV-5-3.5	5(0.1969)	3.5(0.1378)	PM-OV-12-9	12(0.4724)	9(0.3543)