




## EMI Shielding Gasket


### Structure

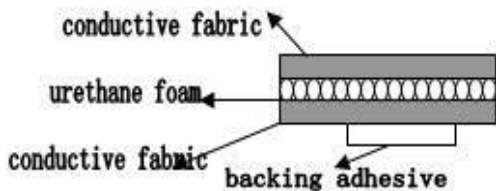

### Performances:

|                      |                                     |
|----------------------|-------------------------------------|
| Frequency            | Attenuation                         |
| 30 MHz               | 90                                  |
| 100 MHz              | >100                                |
| 500 MHz              | >100                                |
| 1 GHz                | >100                                |
| 10 GHz               | 110                                 |
| Surface resistivity: | Nickel/Copper<br>< 0.05 ohms/square |
| Abrasion resistance: | Excellent                           |
| Compression set:     | < 10% (typical)                     |
| Temperature range:   | -40 to +70° (typical)               |

**For such as below shape, please provide the details drawing if there is some require for the angles or others**



P shape please contact us if you need other size.

| Part No       | W(mm/in)     | H(mm/in)    | Part No       | W(mm/in)     | H(mm/in)    |
|---------------|--------------|-------------|---------------|--------------|-------------|
| PM-P-4.93-0.4 | 4.93(0.1941) | 0.4(0.0157) | PM-P-6.97-1.6 | 6.97(0.2744) | 1.6(0.063)  |
| PM-P-5.1-2    | 5.1(0.2008)  | 2(0.0787)   | PM-P-1.3      | 10(0.3937)   | 1.3(0.0512) |
| PM-P-9-1      | 9(0.3543)    | 1(0.0394)   | PM-P-7-9.7    | 7(0.2756)    | 9.7(0.3819) |
| PM-P-5-5      | 5(0.1969)    | 5(0.1969)   | PM-P-15-3.5   | 15(0.5906)   | 3.5(0.1378) |
| PM-P10-5      | 10(0.3937)   | 5(0.1969)   | PM-P-12-5     | 12(0.4724)   | 5(0.1969)   |